

Security Cable - Unscreened

CU SECURITY 0.2 X 4 WH 1HM

Contact

Sales and Customer Solutions
sales.nz@nexans.com

Nexans Ref.: JSC.2WT4C1


Country Ref.: 1794.1

Stranded Cu conductor, PVC insulation, Cores Laid up, White PVC sheath

DESCRIPTION

Application

Suitable for use in control circuits associated with security systems including detection, monitoring and access control. Designed for use in ELV system. Not suitable for mains connection.

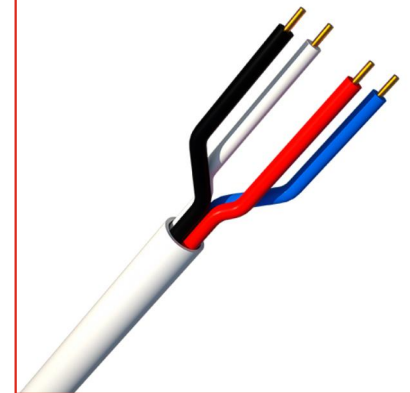

STANDARDS

International
Manufacturer specification

Security Cable - Unscreened

CU SECURITY 0.2 X 4 WH 1HM

Contact

Sales and Customer Solutions
sales.nz@nexans.com

CHARACTERISTICS

Construction characteristics

Conductor material	Copper
Insulation	PVC
Insulation colour	Red, black, white, blue
Sheath colour	White
Outer sheath	PVC

Dimensional characteristics

Number of cores	4
Conductor cross-section	0.22 mm ²
Nominal overall diameter	3.6 mm
Approximate weight	0.01 kg/m

Electrical characteristics

Max. DC resistance of the conductor at 20°C (Ohm/km)	86.5
Maximum operating voltage	50 VAC / 120 VDC

Usage characteristics

Packaging	Spool 100m
-----------	------------